


ISP Stitching & Bindery Products

A Division Of Samuel Strapping Systems

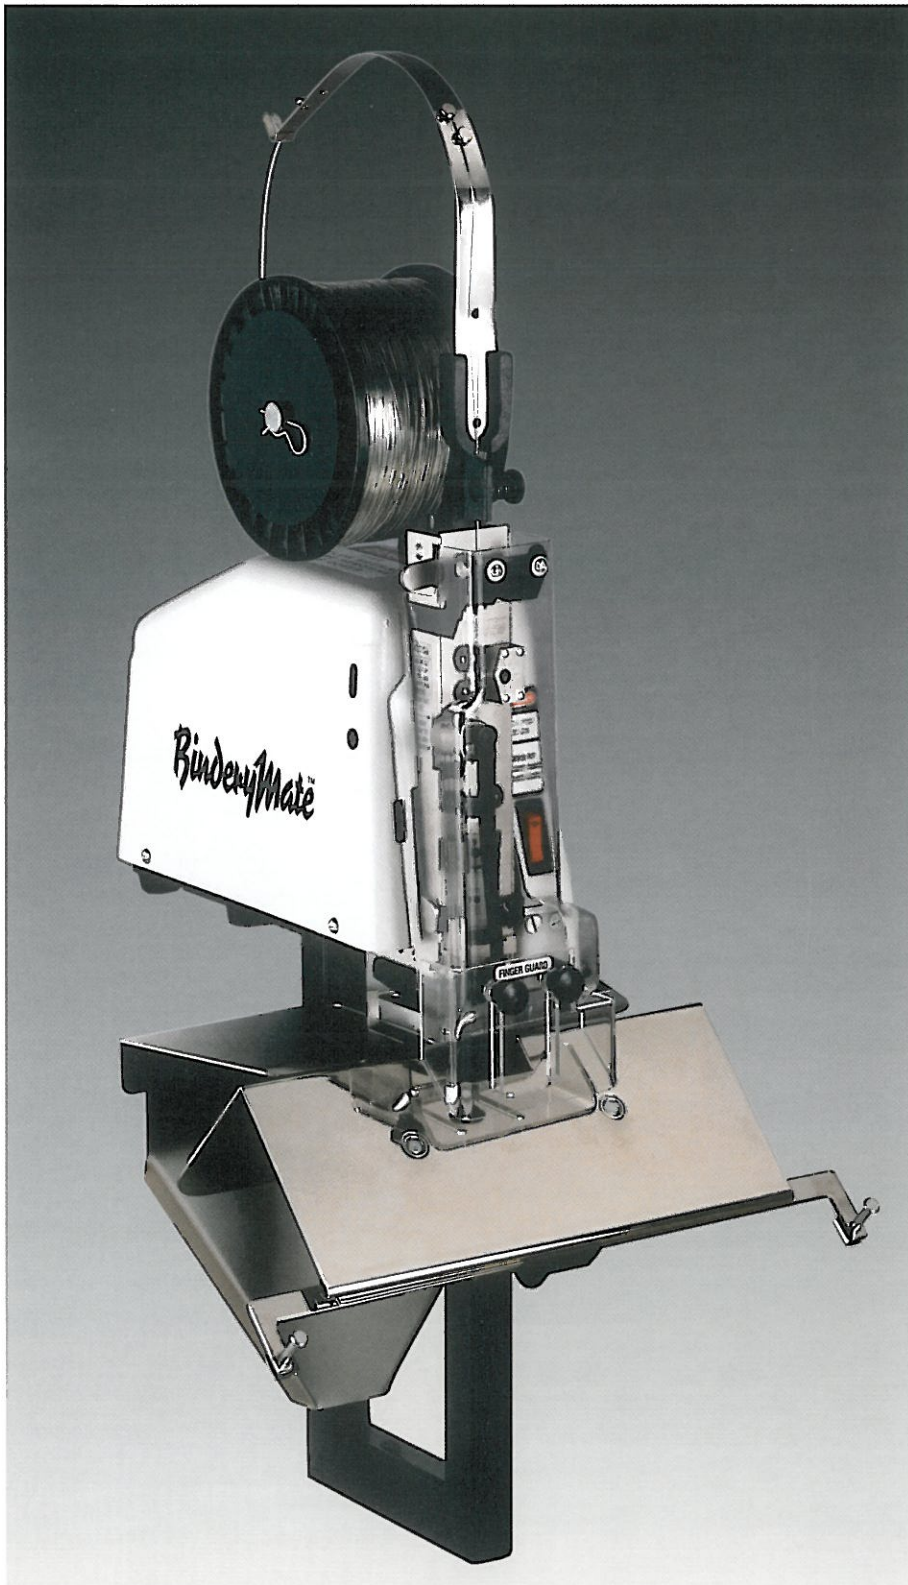

BinderyMate Stitching Machine

**With ISP's
Exclusive Patented
Magnetic Technology**

The Newest Generation In ISP Wire Stitchers.

ISP's BinderyMate represents the newest generation in compact, economically priced wire stitchers. BinderyMate offers logical benefits and advantages through the use of continuous coil wire stitching. BinderyMate is truly "operator friendly": easy-to-load, quiet, jam resistant, and cost efficient.

Completely portable, ISP's BinderyMate has everything you could ask for in a wire stitcher: quick, strong, flexible, gentle, and reliable. It switches from flat to saddle stitching and back again in seconds. The BinderyMate mounts easily to most work tables, or the adjustable ISP stand.

SPECIFICATIONS

Dimensions:

4" wide x 12 $\frac{1}{2}$ " long x 22" high.
With tables and wire guides. . .
10" wide x 15" long x 27" high.
Table (flip-up)-Saddle (flip-down):
4 $\frac{1}{4}$ " wide x 10" long.
Side Guides: Completely adjustable
with pop-up/pop-down pins.
Corner Guides: pop-up/pop-down
pins in table for 45 degree corner stitch.
Auxiliary Rear Table: For flat work
support when deep throat table
stitching. . . 3" wide x 10" long.

Throat Depth:

4 inches maximum.

Maximum Stitching Thickness:

$\frac{1}{4}$ inch.

Stitcher:

M-2000 Head Equipped with
two-position faceplate.

Stitching Speed:

173 stitches per minute, full load capacity.
199 stitches per minute, minimum
load capacity.

Stitch Capacity: (Based on 20lb. Bond Paper)

Minimum Work Adjustment - .94"
wire draw. . . approximately 57,000
stitches per 5 lb. coil - 2 to 30 sheets.
Maximum Work Adjustment - 1.24"
wire draw. . . approximately 43,000
stitches per 5 lb. coil - 31 to 60 sheets.

Stitching Wire:

Wire Size. . . 25 gauge (.20" diameter)

Stitch Mode:

Bump Switch (for table mode).
Foot Pedal (for saddle or table mode).
Non-Repeat.

Jog:

Push-in and turn knob, on rear of
housing, for manual forward or
reverse operation.

Electrical:

Input. . . 115 VAC/60Hz, single phase.
Control Circuit. . . 12VDC.
Motor. . . 1/20HP/90VDC.
Overload Protection. . . Circuit Breakers.

Approximate Weight:


Without Wire Spool. . . 25 lbs.
Add 5 lbs. for Wire Spool.

Optional Accessories:

- CKKK-215 Floor Stand.
- Interconnect Cables for Multiple Unit Operation.
- Work Alignment Gauge.
- Dual Table With Variable Stitch Centers.
- Convenient 2-Pak Replacement Wire.
- 305X Conversion Kit - Converts a single unit into a dual!



**ORIGINAL STAND ADJUSTS
FROM 29" TO 41" IN HEIGHT**

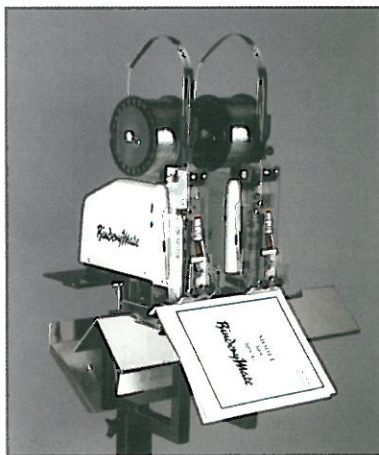

**305R: VARIABLE STITCH
CENTERS: 4 $\frac{1}{2}$ " TO 12"**

ISP Stitching & Bindery Products

A Division Of Samuel Strapping Systems

USA:

3911 S. Memorial Drive • Racine, WI 53403

1-800-345-6641 • 1-262-598-5421 • Fax: 1-262-598-5426

Visit our web-site @ www.ispstitching.com