



ISP Stitching & Bindery Products

A Division Of Samuel Strapping Systems

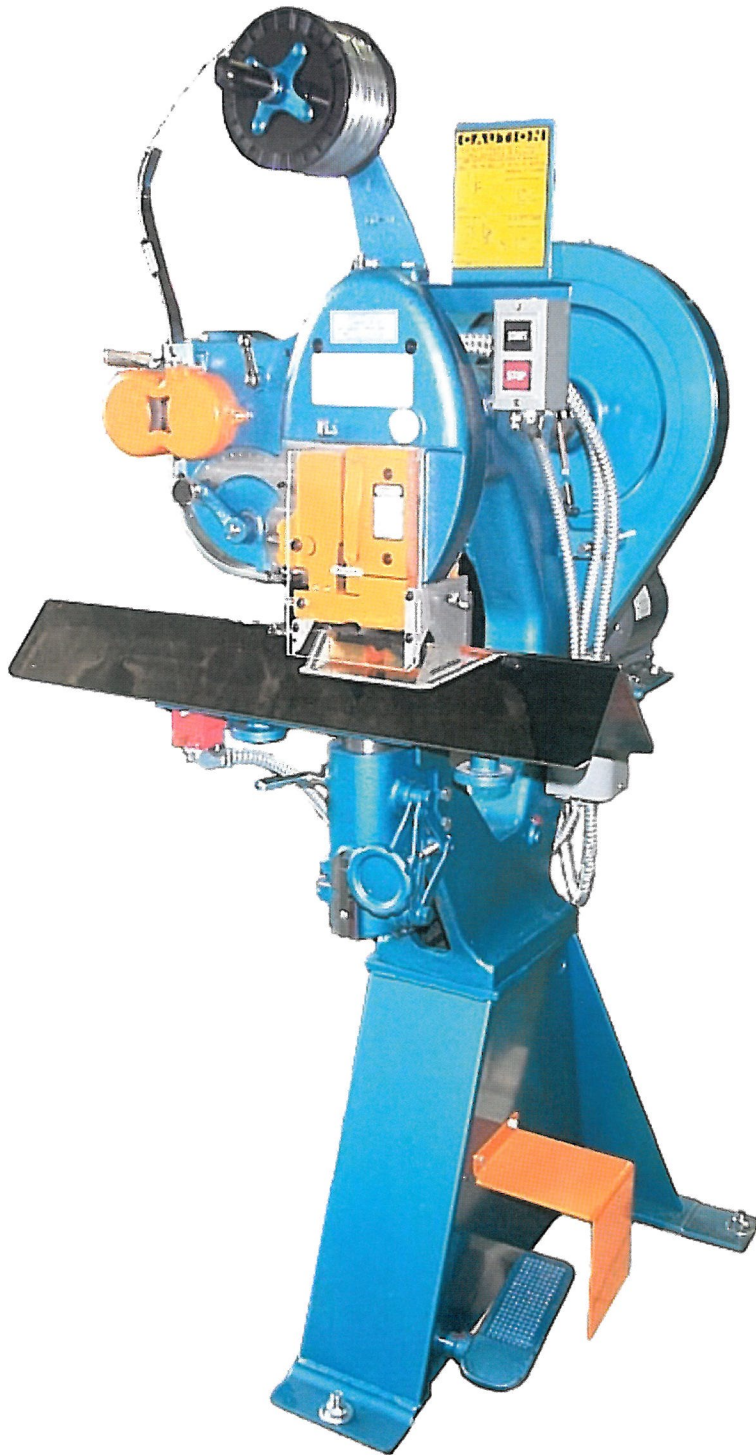


**S3A^{7/8} & S3A^{1 1/8}
Stitching Machines**


New & Improved: ISP's S3A^{7/8} & S3A^{1 1/8} Stitchers.

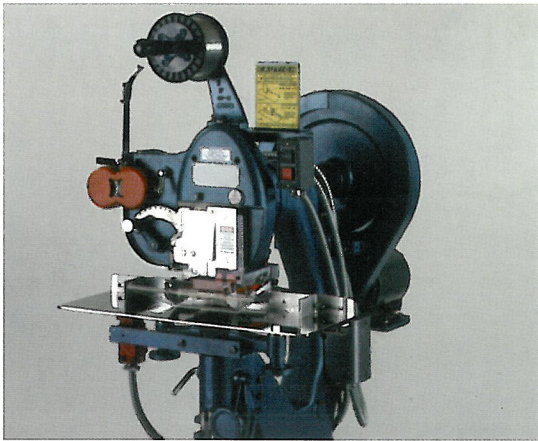

FULLY INTERLOCKED GUARDS...

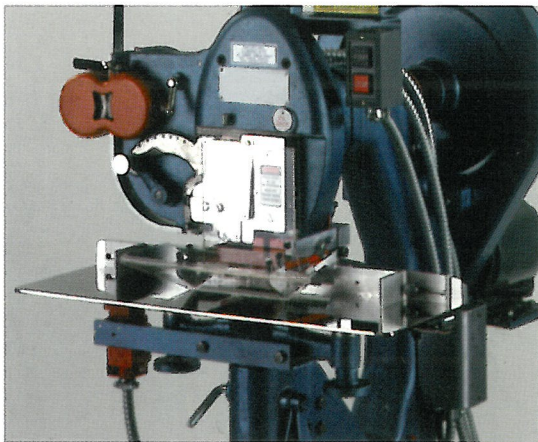

FLAT GUARD PUSHES OPEN...

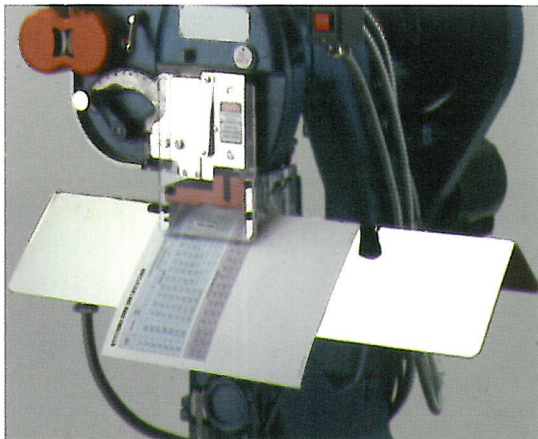

**SADDLE GUARD FOLLOWS TABLE
CONTOUR...**

ISP's Model S3A^{7/8} has long been known as the work horse of the graphics industry. . . now we've made it even better. State of the art guarding now provides the safest possible work environment. The guards are fully electrically interlocked: the machine will not operate when the guards are not in place.

The S3A^{7/8} provides 2 sheets to ⁷/₈" capacity; the S3A^{1 1/8} handles ¹/₈" to 1 ¹/₈". Both feature positive, roll type wire feed mechanisms which automatically adjust for wear. . . this assures long, trouble-free life. Additionally, one handle controls the amount of wire drawn, while compression is independently adjusted for a truly professional stitch.

ISP provides 3 different sets of drivers and formers with the S3A^{7/8} and 2 sets with the S3A^{1 1/8}. This allows precision alignment of the wire, which guarantees optimal performance. Similarly, the S3A^{7/8} uses separate flat and saddle tables for superior stability.

The S3A line of stitchers utilize a positive clutching mechanism which is both efficient and provides fool proof operation. Add to that a virtually indestructible clinching mechanism which can be easily adjusted to change the tightness of the clinched stitch legs, and it's easy to see why for years the S3A line has been the printers choice.

SPECIFICATIONS

Dimensions:

27" x 27 ¹/₂" x 55"

Stitch Capacity*:

S3A^{7/8} - 2 sheets to ⁷/₈"
S3A^{1 1/8} - ¹/₈" to 1 ¹/₈"

Throat Depth:

Flat 12"
Saddle 15"

Crown Size:

S3A^{7/8} - 7/16"
S3A^{1 1/8} - 9/16"

Stitching Speed:

191 stitches per minute

Table Height:

33" from floor

Stitching Wire:

25 round - up to ¹/₄"
20 x 25 flat - up to ¹/₂"
19 x 21 ¹/₂" flat - ¹/₂" to ⁷/₈"

Table Size:

Flat 9" x 21"
Saddle 6" x 26"

Electrical:

115 volt, 60 cycle, 1 phase

Approximate Weight:

Net - 382 pounds
Shipping - 457 pounds

Standard Equipment:

- Driver and formers for 19 x 21 ¹/₂, 20 x 25 and #25 wire (S3A^{7/8} only)
- Drivers and formers for 18 x 20 flat high carbon and 20x25 flat wire (S3A^{1 1/8} only)
- Flat table
- Saddle table (S3A^{7/8} only)
- Back and side gauges
- 1 coil of wire (S3A^{7/8} - 20 x 25)
(S3A^{1 1/8} - 18 x 20)

Optional Equipment:

- 230 volt, 50 or 60 cycle, 1 phase
- Saddle table (S3A^{1 1/8} only)

*Depending upon type, hardness and finish of paper stock or other materials used.

ISP Stitching & Bindery Products

A Division Of Samuel Strapping Systems

USA:

3911 S. Memorial Drive • Racine, WI 53403

1-800-345-6641 • 1-262-598-5421 • Fax: 1-262-598-5426

Visit our web-site @ www.ispstitching.com